



(fig. 1) Pack contents:

- 1) 5m 5th line section attached to 15m flying line section.
- 2) Large stainless steel ring.





(fig. 2) Remove the stainless steel ring, and untie the knot from the end of the rope.

(fig. 3) Thread the rope with the 5cm piece of tape on it through the middle of the swivel.

(fig. 4) Make sure the rope lays on the cleat side of the depower strap as shown.

(fig. 5) Thread the end of the 5th line through the centre hole in the bar ensuring the 5th line is not twisted around the centre line.

(fig. 6) Thread the 5th line through the ring on the bottom of the centre line.

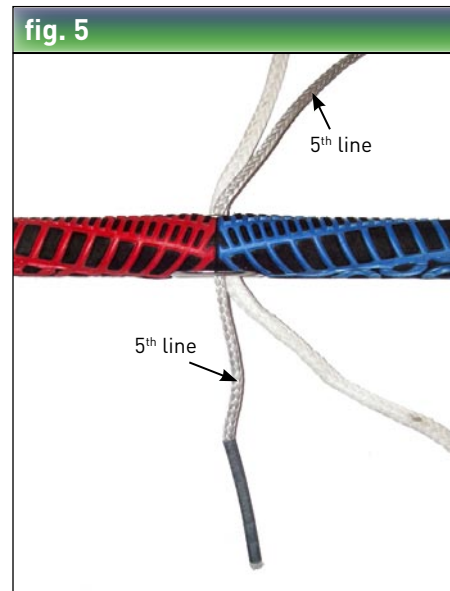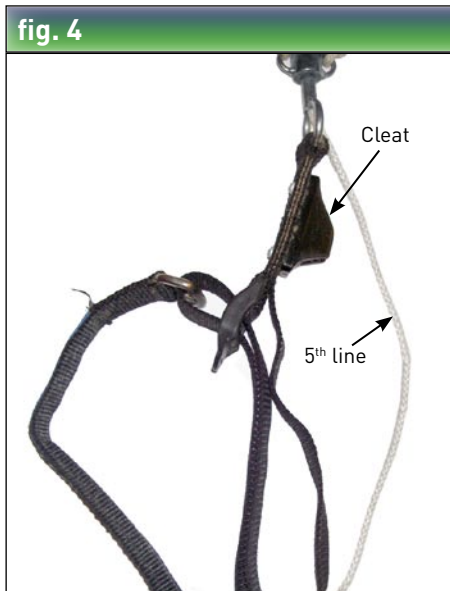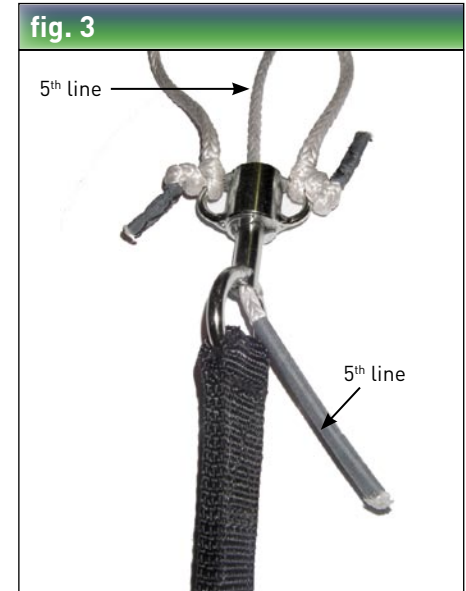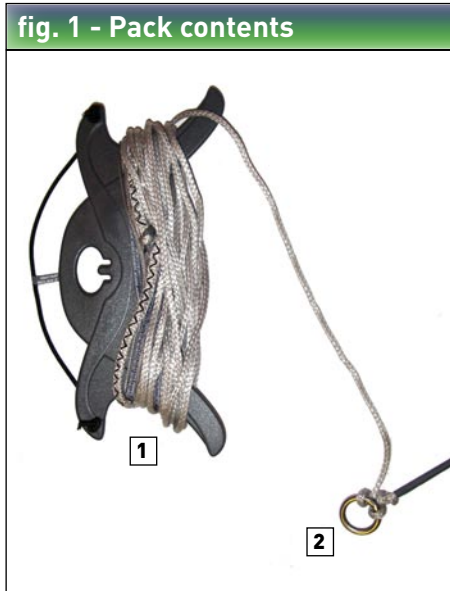

(fig. 7) Tie a knot in the end of the 5th line next to the tape.

(fig. 8) Larkhead the stainless steel ring on to the end of the rope.

(fig. 9) Attach the leash to ring on the end of the 5th line and check all the lines are the same length.

To check the length of your lines, we recommend you attach all flying lines to a fixed point and put the bar in the full power position. Walk back until the lines are fully extended. If all of the lines have equal tension, your lines are of equal length.

If one of your **main lines** is not the correct length, adjust it by changing the length of the leader line on the bar.

If one of your **centre lines** is not the correct length, adjust it by retieing the knot on the spinning swivel above the depower strap.

